


Make a Soft Product *Even Softer*

Dilute **BLUESIL™** RTV 3645 A/B with **BLUESIL™** 47V50 to be optimized for your application. Add 47V50 directly to either the A, B or mixed material and amaze in the results:

- Low viscosity, 1:1, easy to use
- Customize hardness from 50 DS OO down to 30 DS OO
- No effect on surface tack
- Maintain tear of > 50 ppi at levels up to 15%
- Maintain elongation > 750% across dilution levels

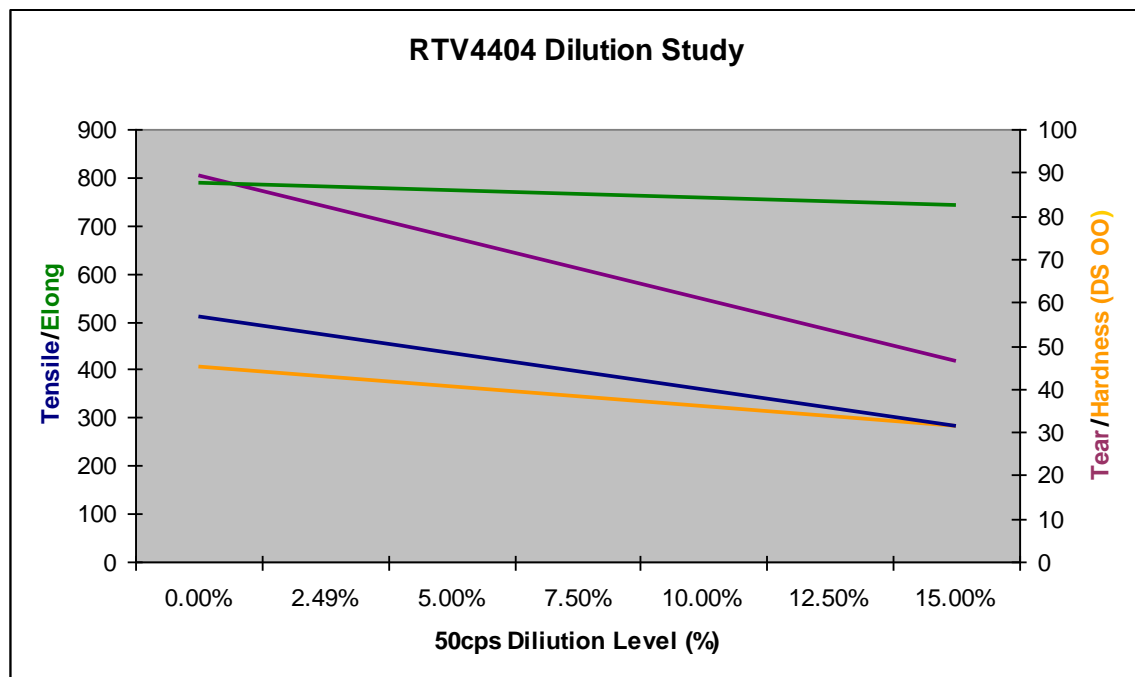

The data provided on this bulletin is given in good faith. The values are to be used as a guideline only, an evaluation by the end user should be completed to optimize the system.